

AG11 Intelligent Self-resettable Overvoltage and Undervoltage Protection Device

1. Product Introduction



AG11-63


Intelligent Self-resettable Overvoltage and Undervoltage Protection Device is a new generation power protection device, which is developed by our company based on the current status of electricity. Its control circuit adopts highly reliable MCU chip and its execution unit uses advanced magnetic relays. The self-resettable overvoltage and undervoltage protection device is produced by modularization standard, so it shows low power consumption, excellent performance and high reliability to ensure work normally under abnormal voltage conditions.

2. Product Features

Intelligent Self-resettable Overvoltage and Undervoltage Protection Device shows features as following:

- Product shape is compatible with the miniature circuit breakers;
- Small size, large switching power, max. current is 63A;
- Embedded high-performance MCU specialty chip to ensure accurate and precise measurement of voltage.
- Saving power because its circuit breaker switch is made by Instantaneous pulse- driving coil;
- Large magnetic latching strength; Vibration resistance; Small contact resistance, low power consumption and reliable performance;
- Optimized circuit design to realize real micro function;
- ※ The protection device will break the circuit when single-phase line is under overvoltage or undervoltage; Without manual operation, the protection device will automatically reset to connect the circuit after single-phase voltage returns to the normal delay value. The protection device will not malfunction when the circuit is under instant or temporary overvoltage.
- ※ The protection device will not be damaged itself if the fault voltage of the circuit reaches the highest value.
- ※ Voltage protection range: Normal type of 40A and below: 0~450V
Intelligent type of 50/63A: 0~600V
- ※ Withstand impulse voltage: 4kv (Compliance with electrical safety standards III class)
- ※ The LED with double color on the panel indicate the working status of the protection device. When the indicator light is green, the power is supplied normally. When the indicator light is red, the power is cutted off.
- ※ Modular design of product appearance following the 2.5P and 2P Standard Modules; Din-rail mounting for installation.
- ※ Connection capacity: insulated wire of 16 mm² and below .
- ※ Power of the intelligent type should be larger than 0.9.

3. Model Number and Meaning

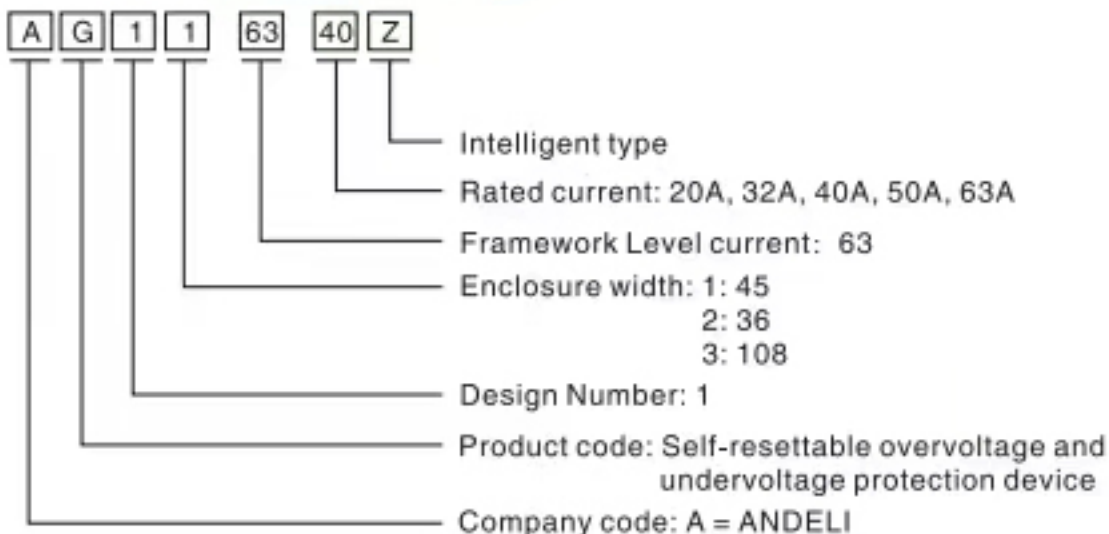

AG11 Intelligent Self-resettable Overvoltage and Undervoltage Protection Device

4. Application

Application scope: AG11 Series Intelligent Self-resettable Overvoltage and Undervoltage Protection Device is suitable for single-phase AC 200V, frequency 50Hz and rated working current 63A and below. When single-phase voltage is abnormal in the grid due to disconnection of neutral line, wrong connection of phase line and neutral line, serious imbalance in three-phase load, large wire resistance, phase dislocation or higher harmonics and other reasons, the protection device will automatically disconnect the power, prevent damage to electrical equipment and thus protect electrical equipment.

The protection device is mainly designed to protect electrical wiring from household distribution box or the distribution line for single-phase electrical equipment. The protection device can be applied in energy consumption monitoring of large public building, enterprise energy management, conservation-oriented campus, engine room and substations, street lighting control, mobile communication base stations and intelligent home and other various fields. The protection device can be used in overvoltage and undervoltage protection, power status display and energy management control unit.

5. Main Technical Parameters

Operating voltage: AC220V

Frequency: 50Hz

Product specification: 20A、32A、40A、50A、63A (Anti-resistance)

Loading power: 4.4KVA、6.6 KVA、8.8 KVA、11 KVA、13.8 KVA

Overvoltage action cut-off value: AC270 \pm 5V

Overvoltage reset value: AC255 \pm 5V

Undervoltage action cut-off value: AC170 \pm 5V

Undervoltage reset value: AC175 \pm 5V


Electricity transmitting delay after power cut-off: \leq 40s

Action delay time: \leq 3s

Self power consumption: \leq 2W

Mechanical life: \geq 100 000 times

Outline Dimension: 83,5 \times 45 \times 66 mm (L \times W \times H)

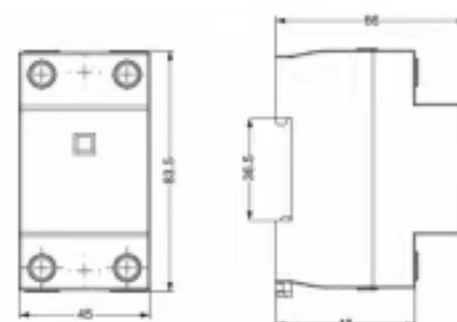

6. Production Specification

Parameters Model Number	Operating voltage	Frequency	Voltage Protection Range	Electricity Transmitting Delay after Power Cut-off	Rated Input Current	Response Speed
AG11-63/20	220V	50Hz \pm 1Hz	165-275V	40s	20A	<10ms
AG11-63/32					32A	
AG11-63/40					40A	
AG11-63/50Z					50A	
AG11-63/63Z					63A	

7. Ordering Note

Please specify when ordering:

Name, Model Number, Max. Current, Quantity

Special voltage and frequency can be customized by negotiation