

Application :

Current:5-400A

Voltage:24-440V

All models feature the same compact dimensions.

Built-in MOV effectively absorbs external surges.

Operation indicator(red LEDa)enables monitoring operation .

Protective cover for greater safety .

DC and AC,ACand AC,DC and DC,AC and DC input versions available.


Typical Applications :

Universal switch and thermal control

Industrial automatic control

Numerical-controlled machinery,remote-control system.

Control Method :

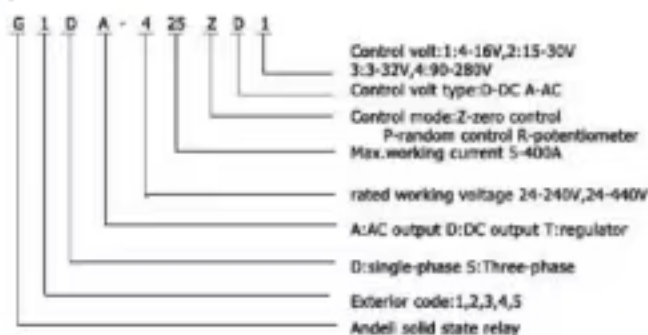


SSR120A-350A

Technical data:

Input		OutputCD			Cooling condition	Safety Coefficient of operatin currentG	
V_{in}	I_{in}	V_{rms}	I_{rms}	$V_{iso} \text{ i/o}$		Resistive loading	inductive loading
DC4-16V(DC)	120mA(DC) 20-50mA(AC)	24-440V(AC)	5-400A	2500V(AC)	with radiator natural wind cooling or water cooling	60%	40%
DC15-30V(DC)							
DC3-32V(DC)							
DC90-280V(AC)							

Dimension:

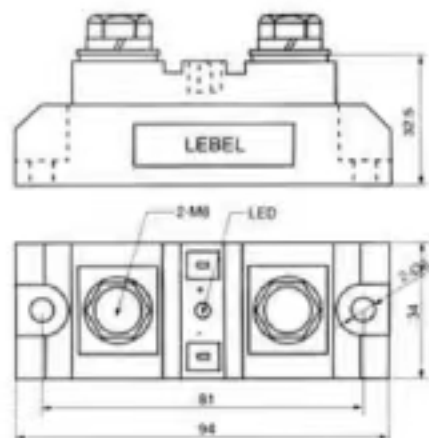

SSR120A-350A