


Rct Series:

Primary current: 100/5-600/5
 Secondary current: 5A, 1A
 Standard approval: BS7626, IEC44-1
 Maximum voltage: 0.66kV
 Frequency: 50/60Hz
 Rated load: 2.5VA-15VA
 Class: 0.5, 0.5s
 Short-time thermal current: $I_{th}=60 \times I_h$
 Rated security coefficient: $FS < 5$

Technical data:

Type	A	VA	Class
RED-40	100/5	2.5	1
	150/5	2.5	1
	200/5	5	1
	250/5	5	1
	300/5	10	1
	400/5	10	1
	500/5	10	1
	600/5	10	1

Outline Drawing:

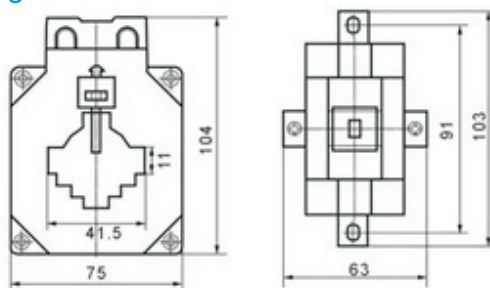

Technical data:

Type	Rated current(A)	VA	Class
EMC-30	100/5	5	0.5
	150/5	5	0.5
	200/5	5	0.5
EMC-40	200/5	5	0.5
	250/5	5	0.5
	300/5	10	0.5
	400/5	10	0.5
	500/5	15	0.5
	600/5	15	0.5

Dimension of case (mm):

Type	A	B	C	D	E	F	G	H
EMC-30	80	108	44	63	77	31	26	11
EMC-40	80	108	44	63	77	41	31	11

Outline Drawing:

