



model	specification										packing	
	Voltage (v)	Wattage(w)	Luminous Flux(lm)	Color temperatrue (k)	Base	Φ(mm)	L(mm)	L1(mm)	A(mm)	C(mm)	Q'ty/ctn(pcs)	LxWxH(cm)
AD-K01	100-130 220-240 50/60	11	600	2700	E26 E27 B22	12	125	74	56	58	50	31.5x31.7x35.5
		15	825	3200			135					
		20	1100	4500			145					
		23	1265	5000			155					
				6400								
			7000									

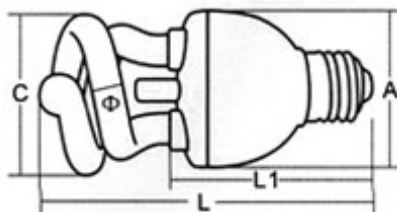

	Voltage (v)	Wattage(w)	Luminous Flux(lm)	Color temperatrue (k)	Base	Φ(mm)	L(mm)	L1(mm)	A(mm)	C(mm)	Q'ty/ctn(pcs)	LxWxH(cm)
AD-K02	100-130 220-240 50/60	11	600	2700	E26 E27 B22	12	125	74	58	58	50	31.5x31.7x35.5
		15	825	3200			135					
		20	1100	4500			145					
		23	1265	5000			155					
				6400								
		7000										

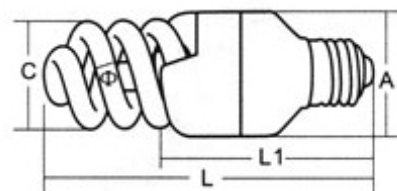

	Voltage (v)	Wattage(w)	Luminous Flux(lm)	Color temperatrue (k)	Base	Φ(mm)	L(mm)	L1(mm)	A(mm)	C(mm)	Q'ty/ctn(pcs)	LxWxH(cm)
AD-K03	100-130	11	550	2700	E26	9	125	85	48	42	100	53.6x27.2x29.2
	220-240	13	650	3200	E27		130					
	50/60	15	750	4500	B22		135					
				5000								
				6400								
			7000									