




Types				Size	Rated voltage(V)	Rate current(A)	Weight(g)	Dimension(mm)			
Ours		Equivalents						ΦA	ΦB	ΦC	L
General (gG)	Fast(aR)	General (gG)	Fast(aR)								
RL1-15	RLS1-15	--	--	--	380	2-15	13	13	16.5	13	32
RL1-60	RLS1-60	--	--	--	380	20-60	6.1	19	26.5	19	49

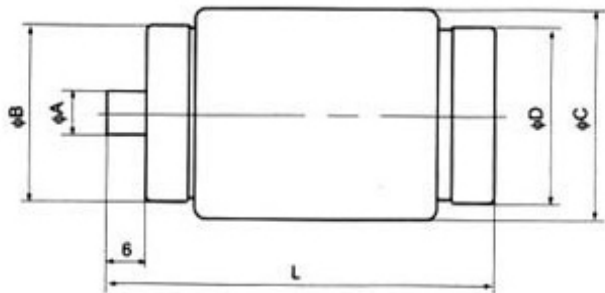

Types				Size	Rated voltage(V)	Rate current(A)	Weight(g)	Dimension(mm)				
Ours		Equivalents						ΦA	ΦB	ΦC	ΦD	L
General (gG)	Fast(aR)	General (gG)	Fast(aR)									
RL1-100	RLS1-100	--	--	--	380	50-100	92.8	6.5	27.5	32.5	27.5	60
RO201	RS201	5SB BLA RL6-100	--	DIV	500	80	112.2	5	--	33.5	28.5	63
						100	115	7	--	33.5	28.5	63
RO202	RS202	5SB BLA	--	DV	600	150-350	200.2	8	--	45	38	63
RO203	RS203	5SB BLA	--	--	600	400-630	320	10	--	60	50	63

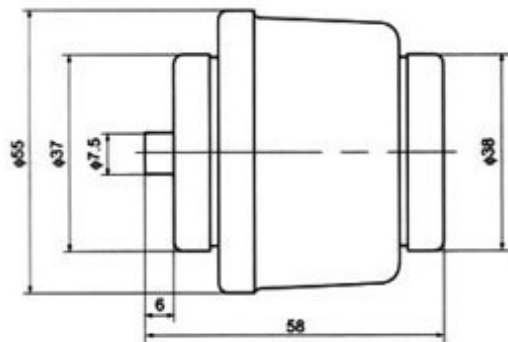


Types				Size	Rated voltage(V)	Rate current(A)	Weight(g)	Dimension(mm)
Ours		Equivalents						
General (gG)	Fast(aR)	General (gG)	Fast(aR)					
RL1-200	RLS1-200	--	--	--	380	160-200	204	See picture

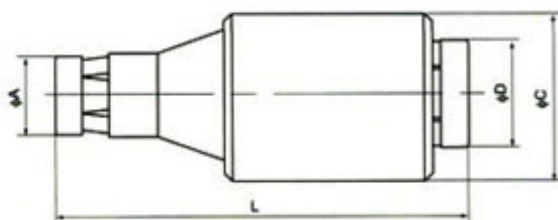


Types				Size	Rated voltage(V)	Rate current(A)	Weight(g)	Dimension(mm)			
Ours		Equivalents						ΦA	ΦC	ΦD	L
General (gG)	Fast(aR)	General (gG)	Fast(aR)								
RO21	RS21	5SB E27 RL6-25	5SD	DII	500	2-6	24.8	6	22	13	50
						8-10		8	22	13	50
						13		8	22	15	50
						16		10	22	15	50
						20		12	22	15	50
						25		14	22	15	50
RO22	RS22	5SB E33 RL6-63	5SD	DIII	500	30-40	48.1	16	27	20	50
						50		18	27	20	50
						63		20	27	20	50
RO23	RS23	--	--	DIII	500	2-6	64	6	27	20	70
						8-10		8	27	20	70
						16		10	27	20	70
						20		12	27	20	70
						25		14	27	20	70
						35		15	27	20	70
						50		18	27	20	70
						63		20	27	20	70
RO24	RS34	E16 5SA	--	--	500	2-6	11.7	6	12.5	11.3	50
						10		8	12.5	11.3	50
						16		10	12.5	11.3	50
						20-25		12	12.5	11.3	50
RO27	RS27	BLA	BLC	--	600	3-10	13.1	8	12.5	11.5	50

RO28	RS28	BLA	BLC	--	600	15-20	14.5	10	12.5	11.5	50
RO29	RS29	BLA	BLC	--	600	25-40	16.4	14	12.5	11.5	50

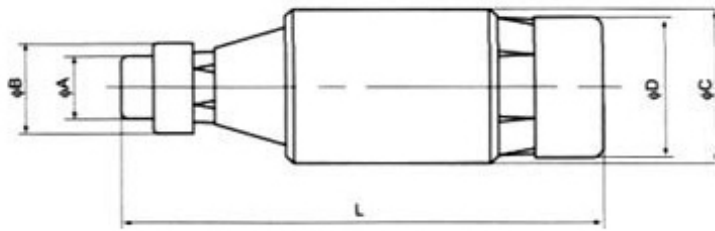

Types				Size	Rated voltage(V)	Rate current(A)	Weight(g)	Dimension(mm)				
Ours		Equivalents						ΦA	ΦB	ΦC	ΦD	L
General (gG)	Fast(aR)	General (gG)	Fast(aR)									
RO26	RS26	E14 RL8 5SE E18	—	D01	400	2-6	12.7	5	7.3	10.6	10	36
						10		5	8.5	10.6	10	36
						16		5	9.7	10.6	10	36
				D02	400	20	13.8	8.5	11	15	14	36
						25		8.5	12	15	14	36
						35		8.5	13.3	15	14	36
						50		8.5	14.5	15	14	36
						63		8.5	16	15	14	36
				D03	400	80	15.6	17	22	22	21	43
						100		17	25	22	21	43

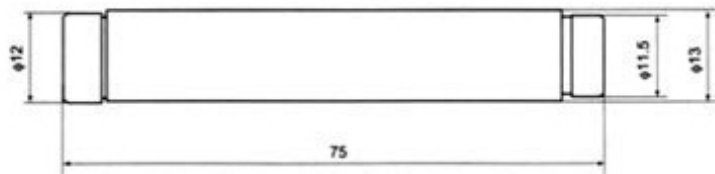

Types				Size	Rated voltage(V)	Rate current(A)	Weight(g)	Dimension(mm)
Ours		Equivalents						
General (gG)	Fast(aR)	General (gG)	Fast(aR)					
RL5-40	--	--	--	--	1140	2-40	22	See picture